



- › High-quality spotlight for many application areas
- › Up to 1980 lumen light intensity
- › Can be swivelled up to 180° individually






4.0192 | SURFACE-SPOTLIGHT

FOR LIGHTING FOUNTAINS AND EXTERIOR AREAS.




- Protection system IP68 – for a water depth of up to 3 m
- Entirely made of stainless steel 316Ti
- Mounting foot adjustable through 180° or 90°
- ...
- operating mode: constant current
- POW-LED cold white, warm white, neutral white, CC
- POW-LED RGB
- operating mode: constant voltage
- POW-LED cold white, warm white, neutral white, CV
- ...
- Cable gland PG13,5, marine grade 316Ti stainless steel
- Temperature-resistant silicon seal
- Toughened safety glass
- Supplied with light source and 3 m of underwater cable


+ ADDITIONAL PARTS




Anti-glare ring
Stainless steel 316Ti, Ø 178 mm, length 203 mm
9.0192.00.70



TIPP
anti-glare louver
black, for POW-LED
4.0003.02.01




glass disc, frosted
for softer light distribution (light loss approx. -15%)
4.0066.01.00



spike
Stainless steel, 395 mm, for mounting foot 90°
4.0305.50.00


★ PRODUCT LINE

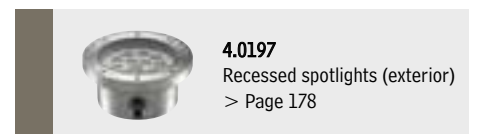

4.0197
Recessed spotlights (exterior)
> Page 178



4.0198
Recessed spotlights (exterior)
> Page 182

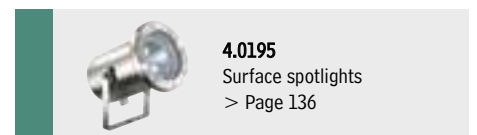

4.0195
Surface spotlights
> Page 136



SURFACE SPOTLIGHT 4.0192

UNDERWATER | EXTERIOR

IP68





180° adjustable



90° adjustable



Anti-glare ring

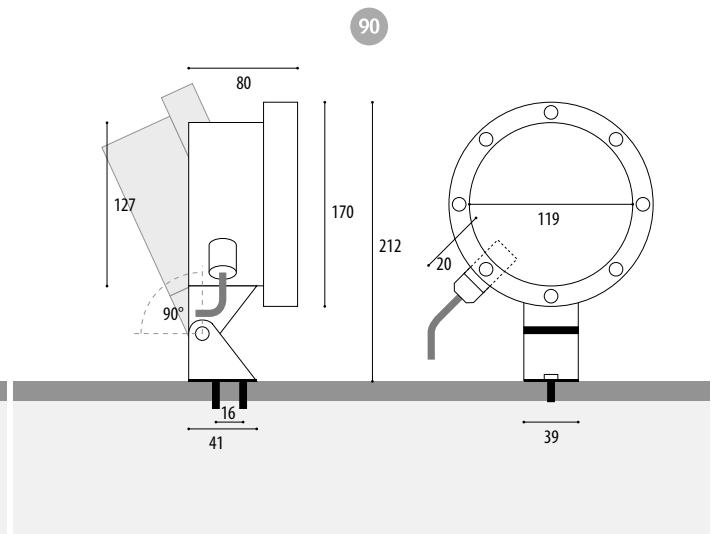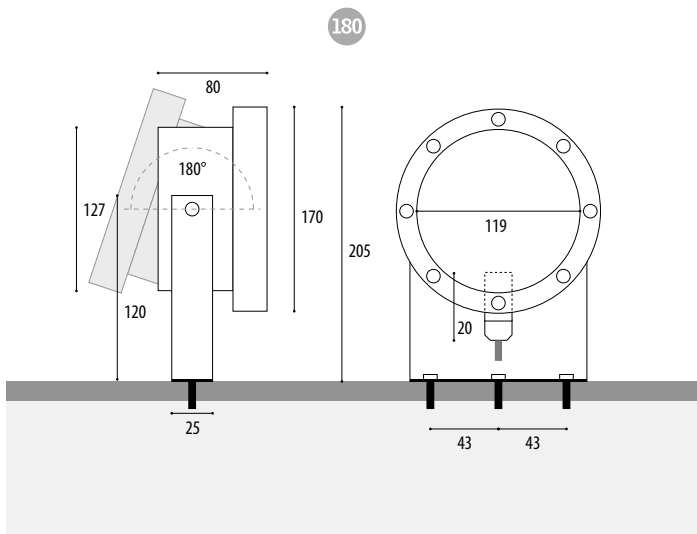

90	180	Article number	Article number	Lamps	Lumen	Light colour	Wattage	Current/Voltage	Socket	Radation angle	Cable	[V]
VERSIONS: UNDER- AND OVERWATER OPERATION (ACCORDING TO PRIOR AGREEMENT)												
POW-LED – 350 MA												
		4.0192.90.01	4.0192.18.01	12 POW-LED	1980 lm	6000K cold white	total 15 W	CC 350 mA	Klemme	30° medium	UW, 2x1,5 qmm	V23
		4.0192.90.02	4.0192.18.02	12 POW-LED	1620 lm	3000K warm white	total 15 W	CC 350 mA	Klemme	30° medium	UW, 2x1,5 qmm	
		4.0192.90.03	4.0192.18.03	12 POW-LED	1860 lm	4500K neutral white	total 15 W	CC 350 mA	Klemme	30° medium	UW, 2x1,5 qmm	
		4.0192.90.09	4.0192.18.09	12 POW-LED		RGB	all on 19 W	CC 350 mA	Klemme	30° medium	UW, 8x0,5 qmm	
POW-LED – 12 V-DC												
		4.0192.90.61	4.0192.18.61	12 POW-LED	1980 lm	6000K cold white	total 15 W	CV 12 V-DC	Klemme	30° medium	UW, 2x1,5 qmm	
		4.0192.90.62	4.0192.18.62	12 POW-LED	1620 lm	3000K warm white	total 15 W	CV 12 V-DC	Klemme	30° medium	UW, 2x1,5 qmm	
		4.0192.90.63	4.0192.18.63	12 POW-LED	1860 lm	4500K neutral white	total 15 W	CV 12 V-DC	Klemme	30° medium	UW, 2x1,5 qmm	
VERSIONS: ONLY UNDERWATER OPERATION												
POW-LED 700 MA												
		4.0192.90.39	4.0192.18.39	12 POW-LED		RGB	all on 34 W	CC 700 mA	Klemme	30° medium	UW, 8x0,5 qmm	



IP68

UNDERWATER | EXTERIOR



< Project
Tauernspa Kaprun, Austria
Photo: Photoart Reifmüller

< Project
Plaza Bolivar Maracay, Venezuela
© Grupo MCI



Power supplies Technical details see from page 234.

5.0635.00.36
5.0635.00.36 Constant Current power supply,
max 3 spotlights
5.0635.00.36
5.0635.09.50 RGB-Controller, max 3 spotlights

5.0600.65.60
5.0600.65.60 Constant Voltage power supply,
max 3 spotlights
5.0600.65.60
5.0600.65.15 Constant Voltage power supply,
max 9 spotlights
5.0600.65.15

5.0670.09.18 RGB-Controller, max 1 spotlightsRGB

NOTE

SOLE
SALINE
SALINE version possible - Article number with additional „S“ at the end

POW-LED, series-connected at 350 mA

POW-LED in parallel connection at 12 V-DC

OPTIONS

Possible beam angle POW-LED



DALI
1-10 V
OPTIONAL
DIMM
12 V-DC dimmable with dimming module 5.0690.03.15. Note: Other cable to the spotlight is required. Requires further agreements.