





# Ideal 40

Ideal is a LED exit light that combines cutting edge technology with modern and elegant design. Profile is ideal to use in office spaces, meeting rooms, hospitals, markets and similar environments where the look matters most. Wide range of mounting options, including wall, ceiling and recessed allows for a consistent look and feel across different areas of building.

Viewing distance: ..... < 40 m  
 Light source: ..... LED  
 IP Class: ..... IP43  
 Supply voltage model A: ..... 24 V AC/DC  
 Supply voltage model B: ..... 230 V AC/DC  
 Supply voltage C/AT: ..... 230 V AC  
 Protection class model A: ..... III  
 Protection class model B and C/AT: ..... I  
 Input power model A: ..... < 3 W  
 Input power model B and C/AT: ..... < 5 W / 6 VA  
 Temperature range: ..... -30...+50°C  
 -For models with battery: ..... -10...+40°C  
 Battery / Backup time NI-MH: ..... Ni-MH 6 V / 3 h  
 Body material: ..... Anodized aluminium  
 -Sign: ..... Acrylic  
 -Endpiece: ..... Polycarbonate  
 Mounting options: ..... Surface, recess  
 Country of origin: ..... Finland  
 Warranty: ..... 2 years  
 Standards: ..... EN 60598-2-22, EN 1838, EN ISO:7010

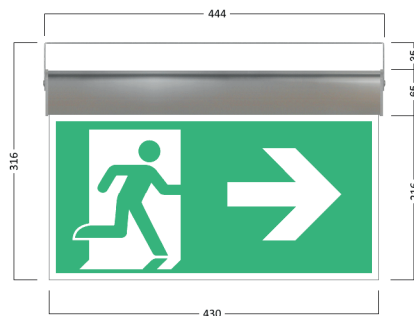

Product code	Name	Sign	Supply voltage	Electrical code (STK)
1006060	IDEAL 40 A	E1	24V AC/DC	4214480
1006062	IDEAL 40 A	E2	24V AC/DC	4214481
1006063	IDEAL 40 A	E3	24V AC/DC	4214482
1006061	IDEAL 40 A	E1/E2	24V AC/DC	4214483
1006064	IDEAL 40 A	E3/E3	24V AC/DC	4214484
1006070	IDEAL 40 B	E1	230V AC/DC	4214485
1006072	IDEAL 40 B	E2	230V AC/DC	4214486
1006073	IDEAL 40 B	E3	230V AC/DC	4214487
1006071	IDEAL 40 B	E1/E2	230V AC/DC	4214488
1006074	IDEAL 40 B	E3/E3	230V AC/DC	4214489
1006080	IDEAL 40 C/AT	E1	230V AC	4214490
1006082	IDEAL 40 C/AT	E2	230V AC	4214491
1006083	IDEAL 40 C/AT	E3	230V AC	4214492
1006081	IDEAL 40 C/AT	E1/E2	230V AC	4214493
1006084	IDEAL 40 C/AT	E3/E3	230V AC	4214494

### IDEAL 40 CG-S

Product code	Name	Sign	Supply voltage
1000920	IDEAL 40 B CG-S	E1	230V AC/DC
1000921	IDEAL 40 B CG-S	E2	230V AC/DC
1000922	IDEAL 40 B CG-S	E3	230V AC/DC
1000923	IDEAL 40 B CG-S	E1/E2	230V AC/DC
1000924	IDEAL 40 B CG-S	E3/E3	230V AC/DC

### IDEAL 40 CG-S Ready

Product code	Name	Sign
1000935	IDEAL 40 CG-S Ready	E1
1000936	IDEAL 40 CG-S Ready	E2
1000937	IDEAL 40 CG-S Ready	E3
1000938	IDEAL 40 CG-S Ready	E1/E2
1000939	IDEAL 40 CG-S Ready	E3/E3

### IDEAL 40 Dali

Product code	Name	Sign	Supply voltage
1000470	IDEAL 40 B DALI	E1	230V AC/DC
1000468	IDEAL 40 B DALI	E2	230V AC/DC
1000467	IDEAL 40 B DALI	E3	230V AC/DC
1000466	IDEAL 40 B DALI	E1/E2	230V AC/DC
1000469	IDEAL 40 B DALI	E3/E3	230V AC/DC
1000476	IDEAL 40 C/AT DALI	E1	230V AC
1000477	IDEAL 40 C/AT DALI	E2	230V AC
1000478	IDEAL 40 C/AT DALI	E3	230V AC
1000479	IDEAL 40 C/AT DALI	E1/E2	230V AC
1000480	IDEAL 40 C/AT DALI	E3/E3	230V AC

### IDEAL 40 PLANSAFE Ready

Product code	Name
1800065	IDEAL 40 A
1811025	IDEAL 40 B



### Installation- and spare parts

Product code	Name	Electrical code (STK)
1005740	Battery Ni-MH 6V	8778090
1005760	LED Driver B	
1005765	LED Driver + Charger C/AT	
1005310	LED Unit A, 6/31x400-RE 24V	
1005360	LED Unit B,C C 6x400-RE 350mA	
1005904	Protective Mesh Cage 320x480x110mm	
1005705	Flag Bracket	
1222031	Handle Bracket (Standard)	
1005694	Recess mounting frame / Decorative plate model A and B	
1005698	Recess mounting frame / Decorative plate model C/AT	
1005683	Recess mounting frame / Decorative plate	

